


X-10 Single Stage Rotary Vane Vacuum Pump



Item	Unit	X-10
Rated Speed	m3/h	10
Utmost Pressure	mbar	0.1-0.5
Noice	dB (A)	61
Work temperature	°C	81
Oil consumption	L	0.5
Vapor permitted pressure	mbar	40
Suction rate of vapour	kg/h	0.15
Whorl of inlet	inch	Rp3/4"
Motor rated power	kW	0.37
Motor rated rotating speed	rpm	1440
Total weight	kg	17

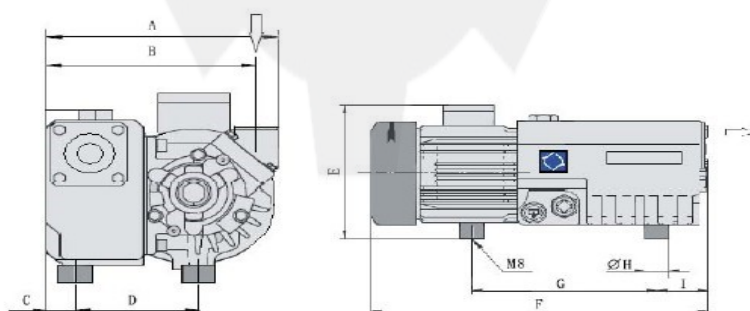


Dimension	A	B	C	D	E	F	G	H	I
X-10	232	213	26	130	220	480	226	30	117
Three Phases									
X-10	232	213	26	130	220	465	210	30	117



Vacuum Curve

标准排量
Nominal
displacement

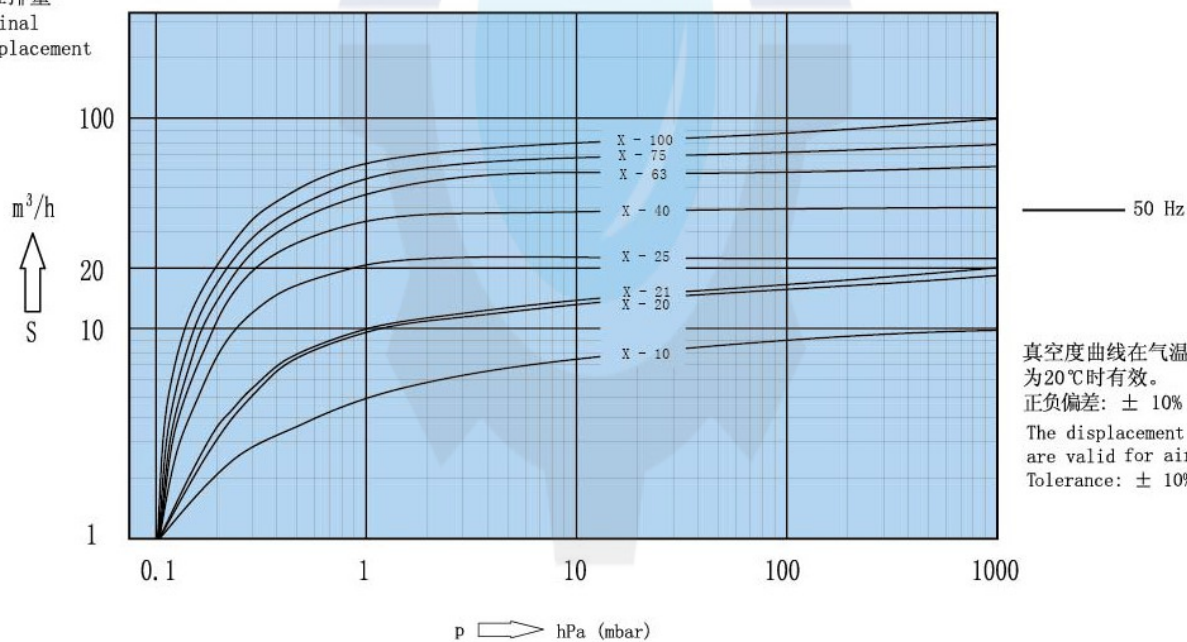


Product

link : <https://agmacorp.com/product/%D9%BE%D9%85%D9%BE-%D9%88%DA%A9%DB%8C%D9%88%D9%85-%D8%B1%D9%88%D8%BA%D9%86%DB%8C-%D8%AC%D9%88%DB%8C%D8%B3%D8%A7%D9%86-joysun/>


X-21 Single Stage Rotary Vane Vacuum Pump



Item	Unit	X-21
Rated Speed	m3/h	21
Utmost Pressure	mbar	0.1-0.5
Noice	dB (A)	62
Work temperature	°C	82
Oil consumption	L	0.5
Vapor permitted pressure	mbar	40
Suction rate of vapour	kg/h	0.3
Whorl of inlet	inch	Rp3/4"
Motor rated power	kW	0.75
Motor rated rotating speed	rpm	2880
Total weight	kg	18

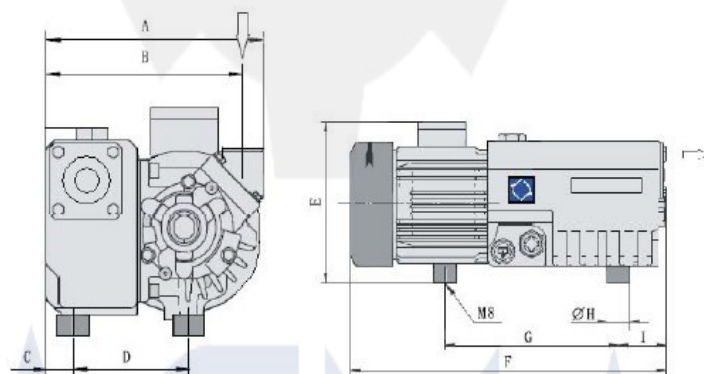


Dimension	A	B	C	D	E	F	G	H	I
X-21	232	213	26	130	220	480	226	30	117
Three Phases									
X-21	232	213	26	130	220	473	215	30	117

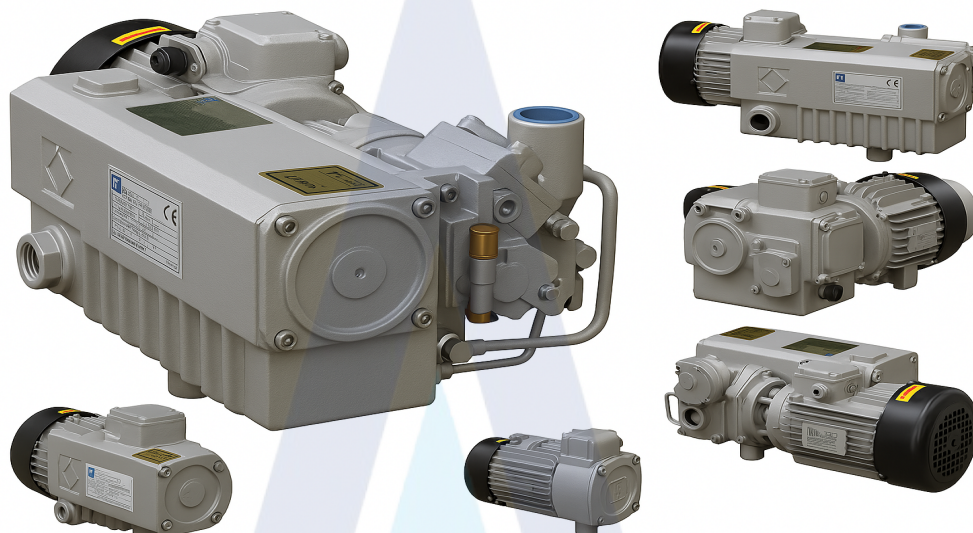

Vacuum Curve

标准排量
Nominal
displacement

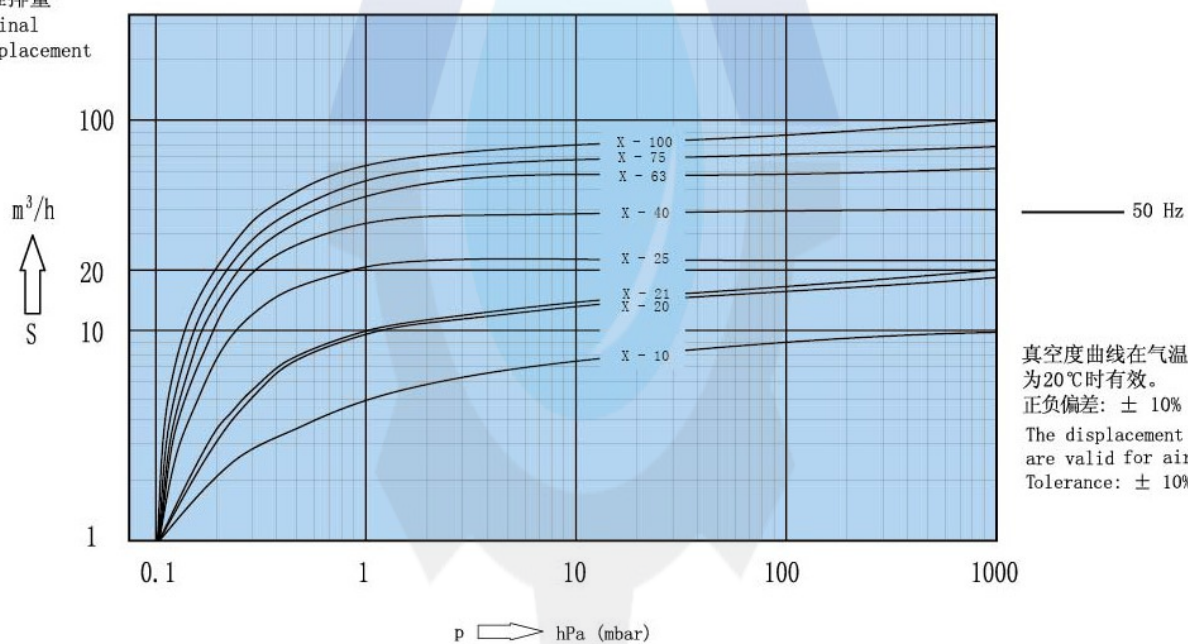

link :🔗


<https://agmacorp.com/product/%D9%BE%D9%85%D9%BE-%D9%88%DA%A9%DB%8C%D9%88%D9%85-%D8%B1%D9%88%D8%BA%D9%86%DB%8C-%D8%AC%D9%88%DB%8C%D8%B3%D8%A7%D9%86-joysun/>

AGMA


X-25 Single Stage Rotary Vane Vacuum Pump



Item	Unit	X-25
Rated Speed	m3/h	25
Utmost Pressure	mbar	0.1-0.5
Noice	dB (A)	62
Work temperature	°C	82
Oil consumption	L	0.5
Vapor permitted pressure	mbar	40
Suction rate of vapour	kg/h	0.4
Whorl of inlet	inch	Rp3/4"
Motor rated power	kW	0.9
Motor rated rotating speed	rpm	2880
Total weight	kg	19

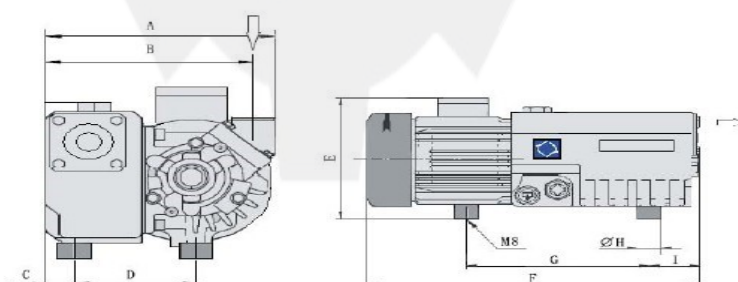


Dimension	A	B	C	D	E	F	G	H	I
X-25	232	213	26	130	220	480	235	30	117
Three Phases									
X-25	232	213	26	130	220	473	224	30	117

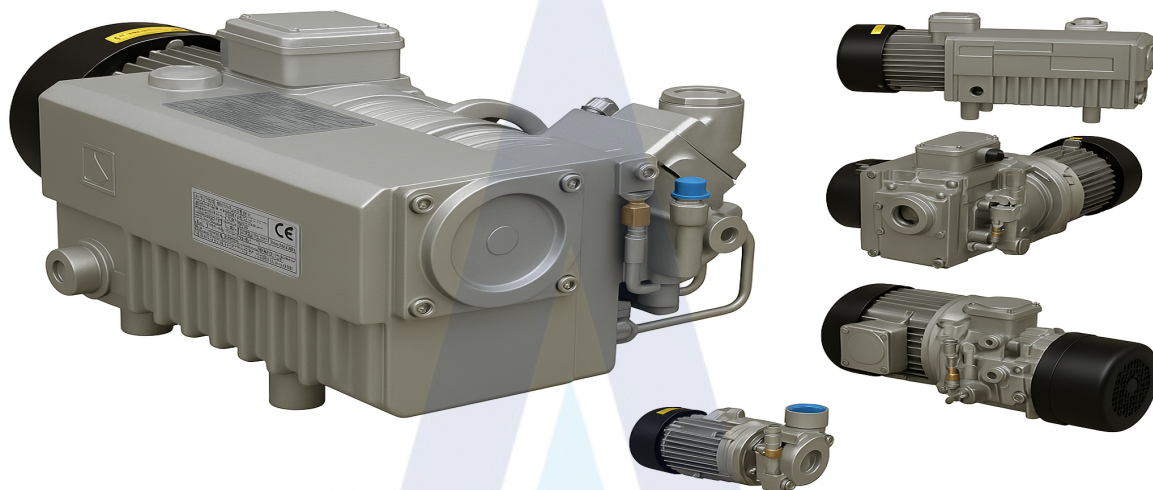

Vacuum Curve

标准排量
Nominal
displacement

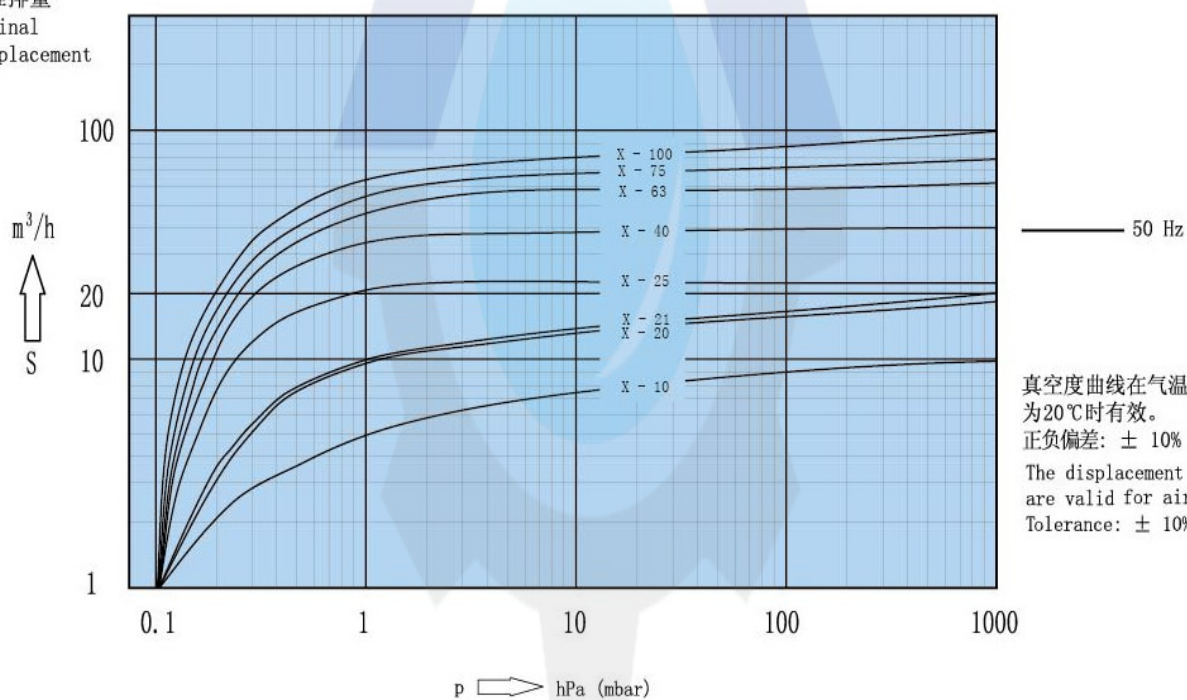

link :


<https://agmacorp.com/product/%D9%BE%D9%85%D9%BE-%D9%88%DA%A9%DB%8C%D9%88%D9%85-%D8%B1%D9%88%D8%BA%D9%86%DB%8C-%D8%AC%D9%88%DB%8C%D8%B3%D8%A7%D9%86-joysun/>

AGMA


X-40 Single Stage Rotary Vane Vacuum Pump



Item	Unit	X-40
Rated Speed	m3/h	40
Utmost Pressure	mbar	0.1-0.5
Noice	dB (A)	64
Work temperature	°C	83
Oil consumption	L	1.5
Vapor permitted pressure	mbar	40
Suction rate of vapour	kg/h	0.6
Whorl of inlet	inch	Rp1 1/4"
Whorl of outlet	inch	Rp1 1/4"
Motor rated power	kW	1.1
Motor rated rotating speed	rpm	1440
Total weight	kg	48
Vacuum pump size	cm	65*30*28

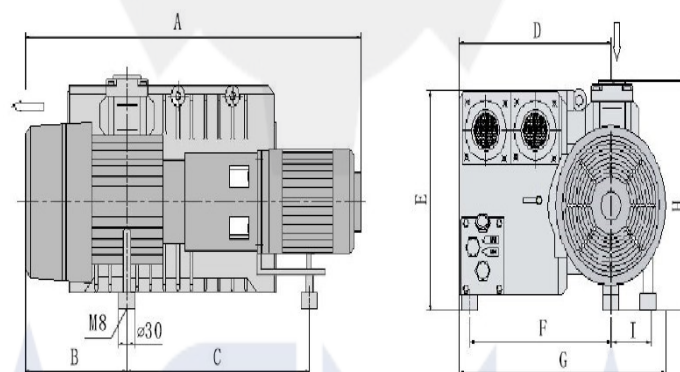


Dimension	A	B	C	D	E	F	G	H	I
X-40	650	150	290	195	270	185	300	280	55

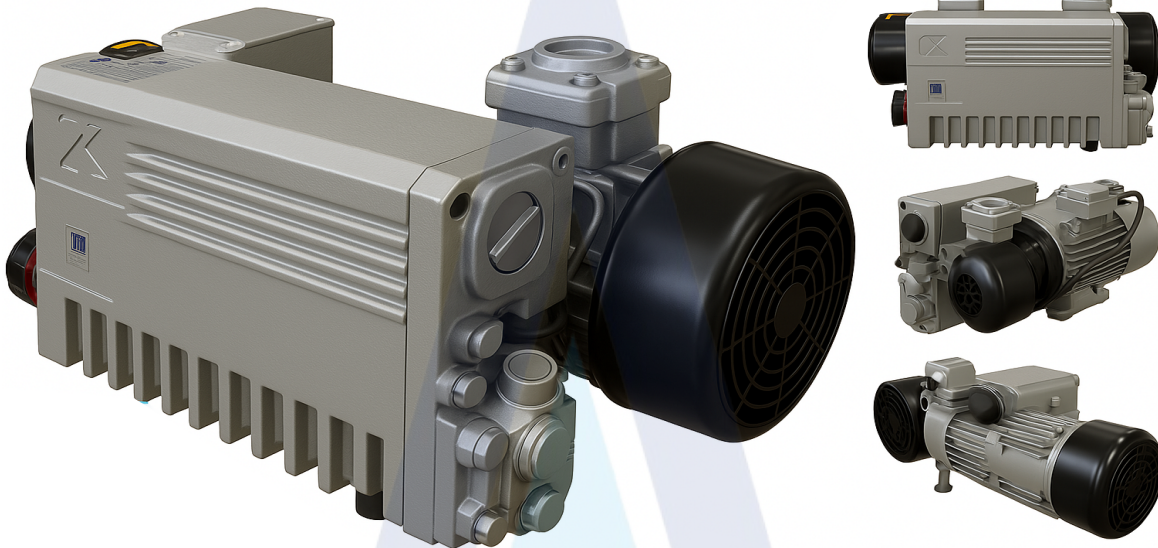

Vacuum Curve

标准排量
Nominal
displacement

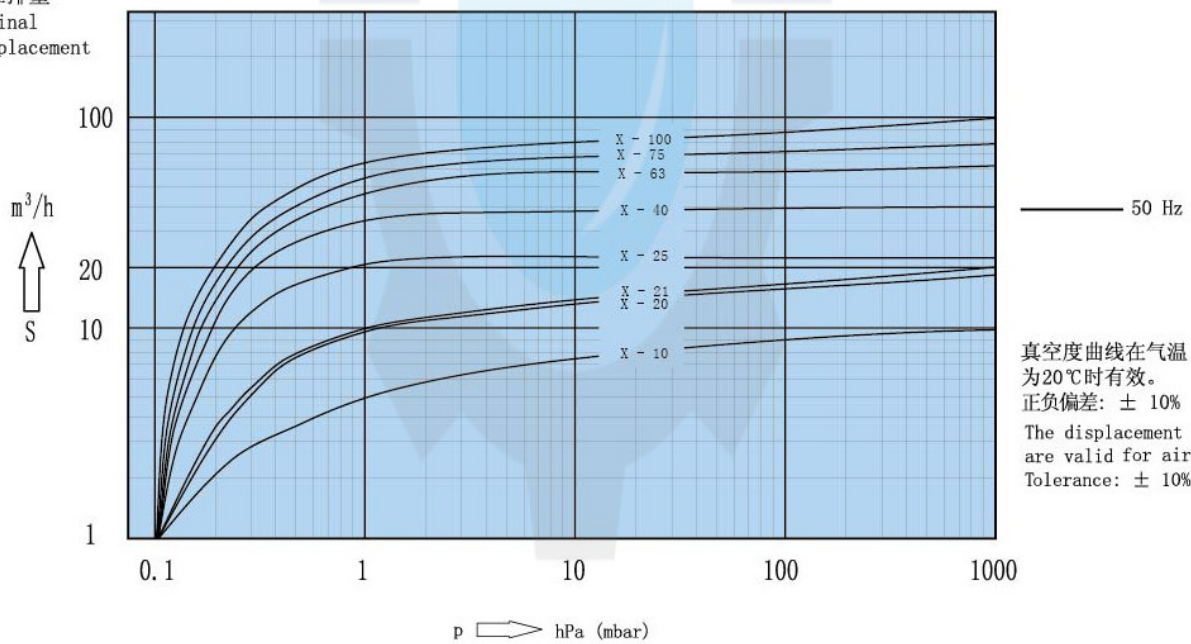


link :

<https://agmacorp.com/product/%D9%BE%D9%85%D9%BE-%D9%88%DA%A9%DB%8C%D9%88%D9%85-%D8%B1%D9%88%D8%BA%D9%86%DB%8C-%D8%AC%D9%88%DB%8C%D8%B3%D8%A7%D9%86-joysun/>

X-63 Single Stage Rotary Vane Vacuum Pump




Item	Unit	X-63
Rated Speed	m3/h	63
Utmost Pressure	mbar	0.1-0.5
Noice	dB (A)	65
Work temperature	°C	84
Oil consumption	L	2
Vapor permitted pressure	mbar	40
Suction rate of vapour	kg/h	1
Whorl of inlet	inch	Rp1 1/4"
Whorl of outlet	inch	Rp1 1/4"
Motor rated power	kW	1.5
Motor rated rotating speed	rpm	1440
Total weight	kg	58
Vacuum pump size	cm	65*43*29.5

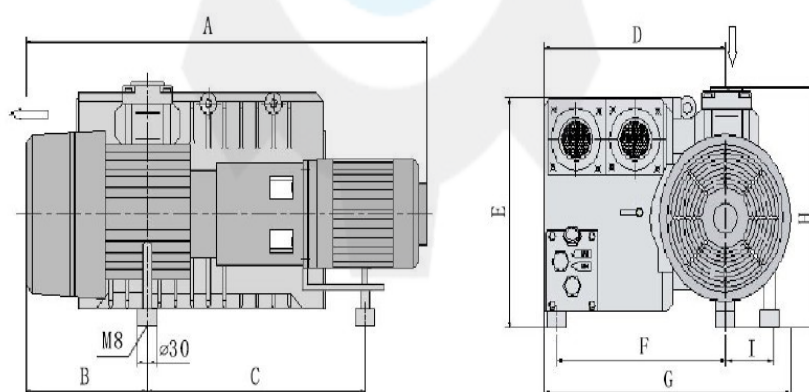

Dimension	A	B	C	D	E	F	G	H	I
X-63	650	150	265	295	285	278	430	295	-

Vacuum Curve

标准排量
Nominal
displacement

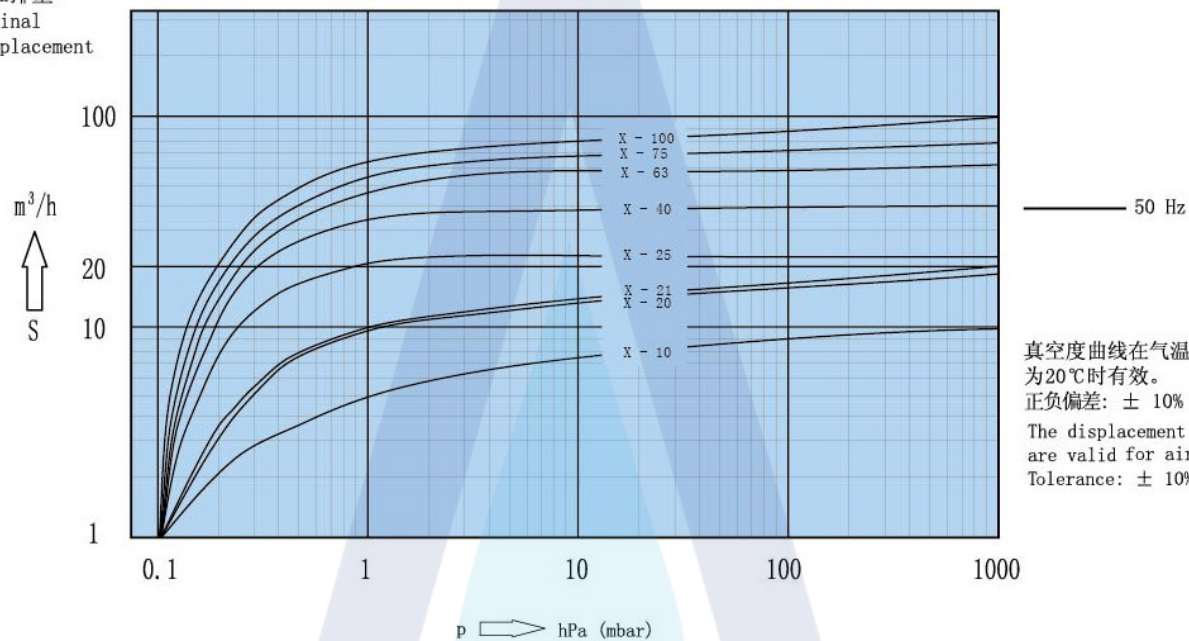


link :

<https://agmacorp.com/product/%D9%BE%D9%85%D9%BE-%D9%88%DA%A9%DB%8C%D9%88%D9%85-%D8%B1%D9%88%D8%BA%D9%86%DB%8C-%D8%AC%D9%88%DB%8C%D8%B3%D8%A7%D9%86-joysun/>

X-100 Single Stage Rotary Vane Vacuum Pump



Item	Unit	X-100
Rated Speed	m3/h	100
Utmost Pressure	mbar	0.1-0.5
Noice	dB (A)	66
Work temperature	°C	85
Oil consumption	L	2
Vapor permitted pressure	mbar	40
Suction rate of vapour	kg/h	1.6
Whorl of inlet	inch	Rp1 1/4"
Whorl of outlet	inch	Rp1 1/4"
Motor rated power	kW	2.2
Motor rated rotating speed	rpm	1440
Total weight	kg	72
Vacuum pump size	cm	72*43*29.5

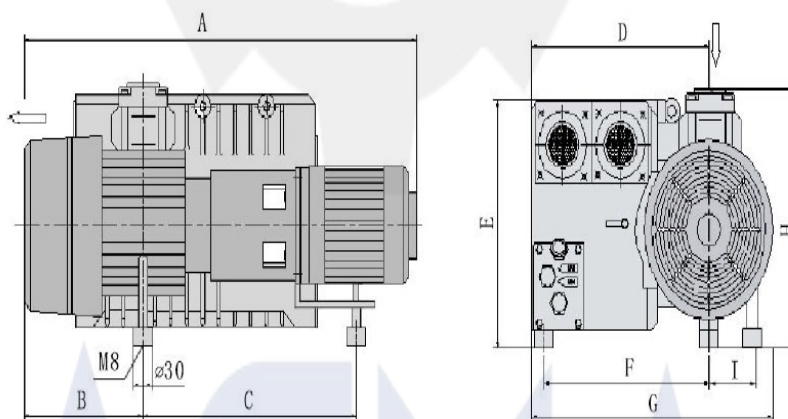


Dimension	A	B	C	D	E	F	G	H	I
X-100	720	180	295	295	285	278	430	295	-



Vacuum Curve

标准排量
Nominal
displacement

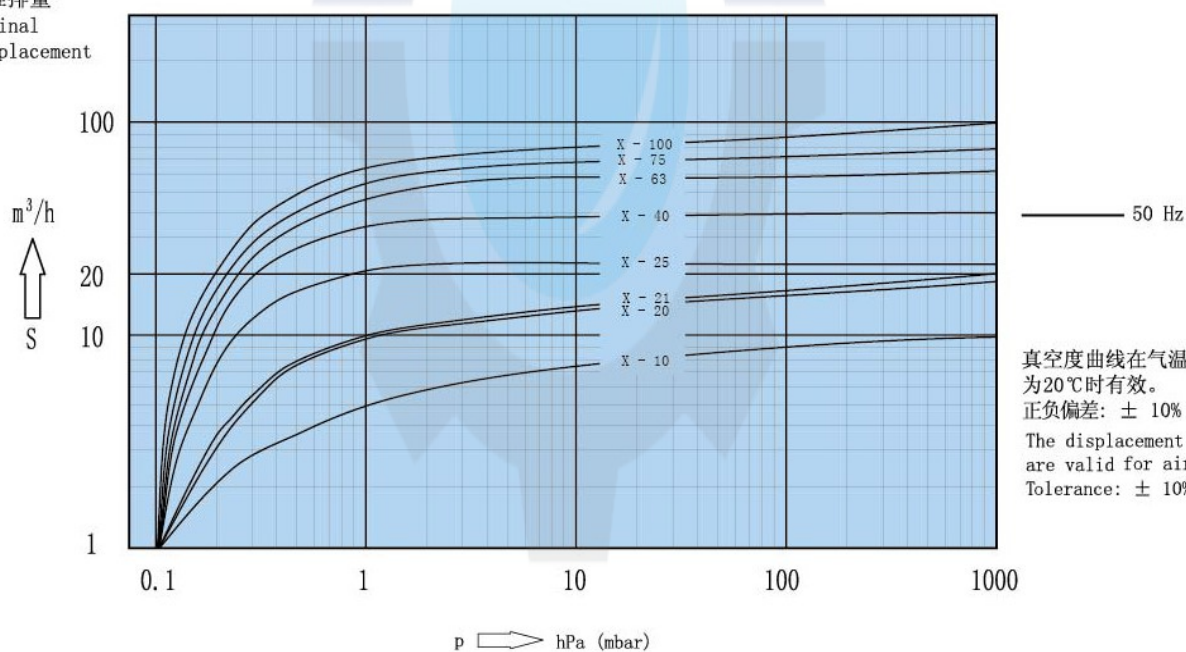


link :

<https://agmacorp.com/product/%D9%BE%D9%85%D9%BE-%D9%88%DA%A9%DB%8C%D9%88%D9%85-%D8%B1%D9%88%D8%BA%D9%86%DB%8C-%D8%AC%D9%88%DB%8C%D8%B3%D8%A7%D9%86-joysun/>

X-160 Single Stage Rotary Vane Vacuum Pump




Item	Unit	X-160
Rated Speed	m ³ /h	160
Utmost Pressure	mbar	0.1-0.5
Noice	dB (A)	71
Work temperature	°C	65
Oil consumption	L	5
Vapor permitted pressure	mbar	40
Suction rate of vapour	kg/h	2.5
Whorl of inlet	inch	Rp2"
Whorl of outlet	inch	Rp2"
Motor rated power	kW	4
Motor rated rotating speed	rpm	1440
Total weight	kg	157
Vacuum pump size	cm	85.5*49.5*43.5

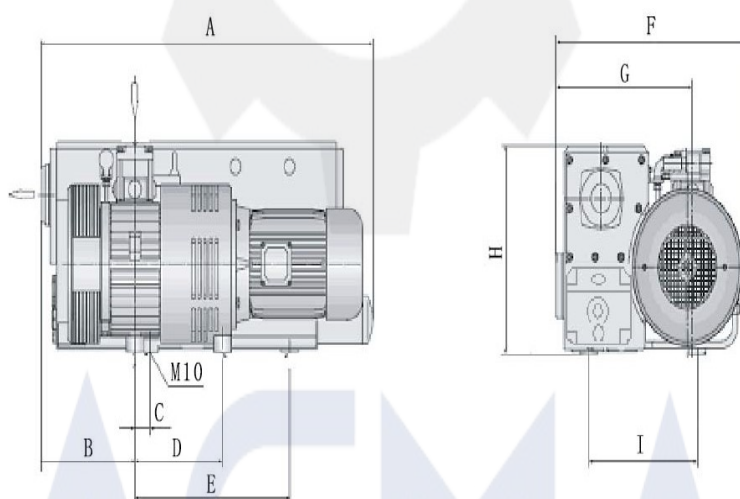

Dimension	A	B	C	D	E	F	G	H	I
X-160	855	225	40	240	430	495	345	435	310

Vacuum Curve

标准排量
Nominal
displacement

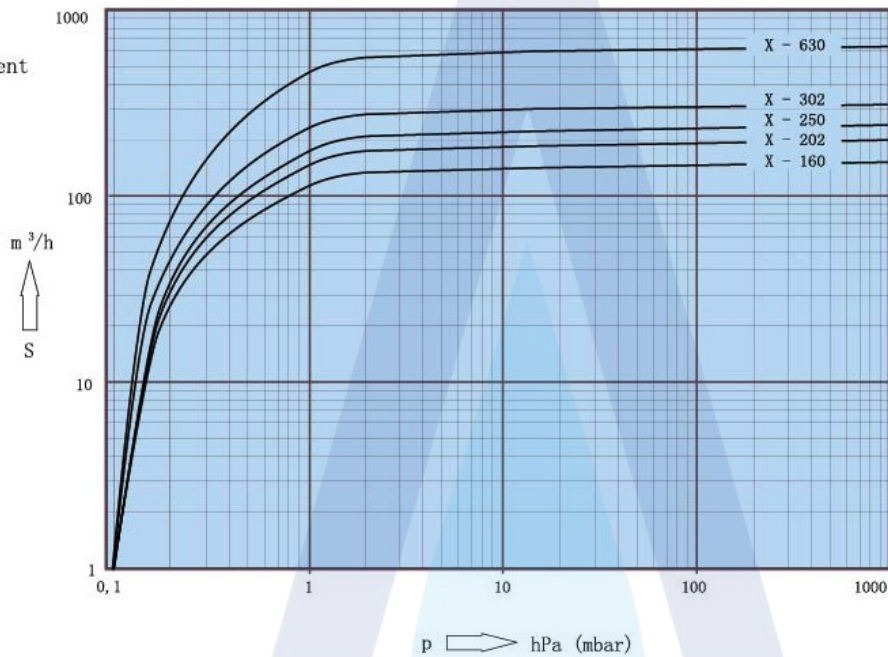


link :

<https://agmacorp.com/product/%D9%BE%D9%85%D9%BE-%D9%88%DA%A9%DB%8C%D9%88%D9%85-%D8%B1%D9%88%D8%BA%D9%86%DB%8C-%D8%AC%D9%88%DB%8C%D8%B3%D8%A7%D9%86-joysun/>


X-250 Single Stage Rotary Vane Vacuum Pump



Item	Unit	X-250
Rated Speed	m3/h	250
Utmost Pressure	mbar	0.1-0.5
Noice	dB (A)	73
Work temperature	°C	81
Oil consumption	L	8
Vapor permitted pressure	mbar	40
Suction rate of vapour	kg/h	4.5
Whorl of inlet	inch	Rp2"
Whorl of outlet	inch	Rp2"
Motor rated power	kW	5.5
Motor rated rotating speed	rpm	1440
Total weight	kg	195
Vacuum pump size	cm	98*56*44

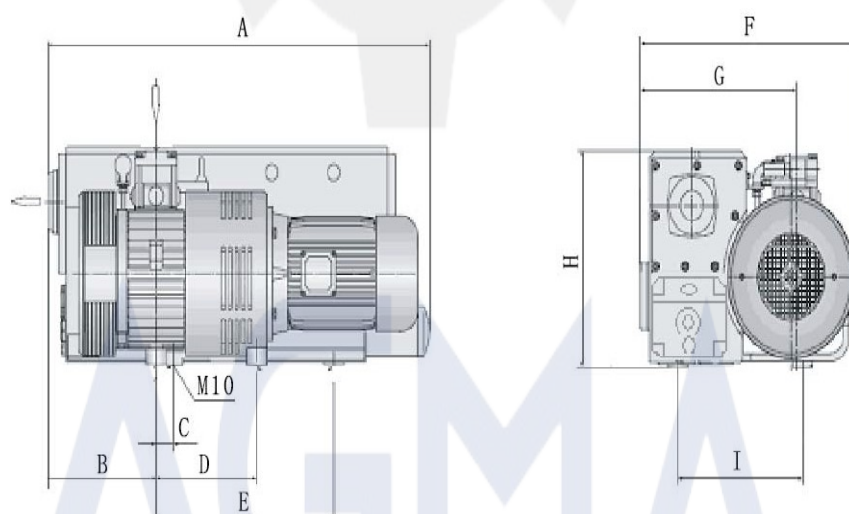


Dimension	A	B	C	D	E	F	G	H	I
X-250	980	260	-	300	390	560	385	440	355

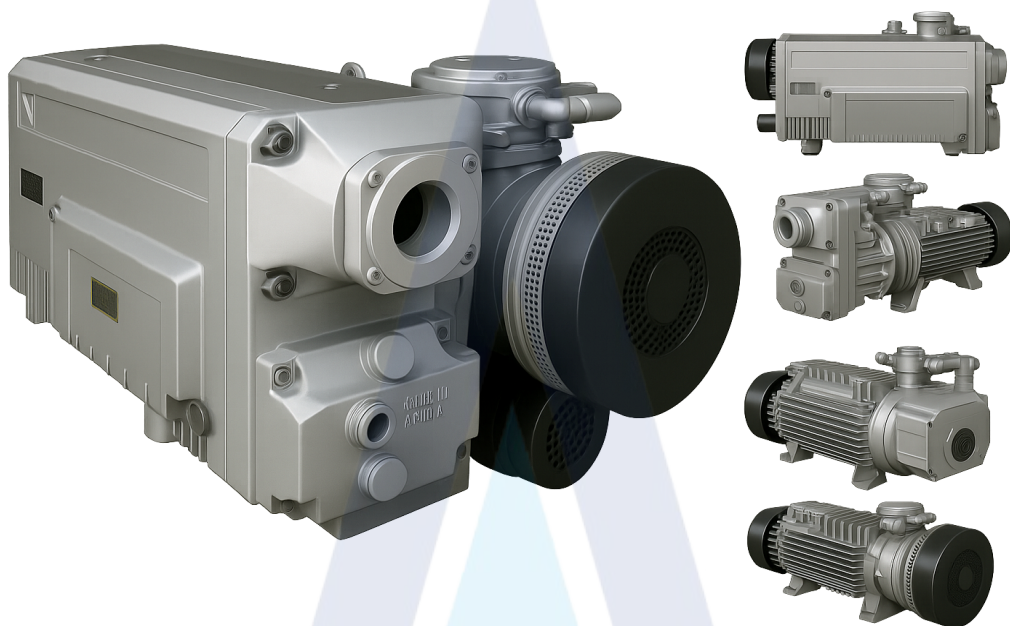

Vacuum Curve

标准排量
Nominal
displacement

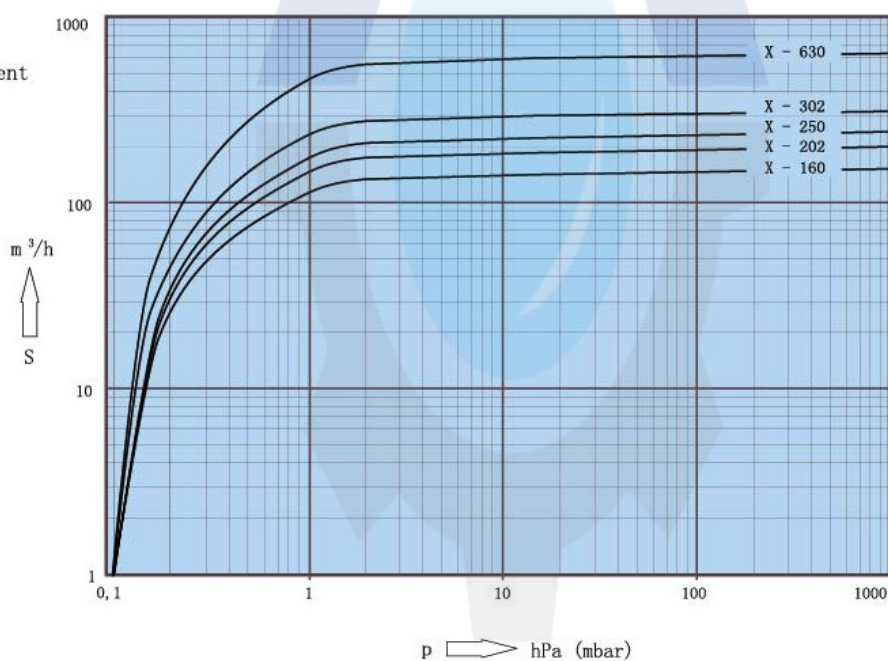

真空度曲线在气温
 为20℃时有效。
 正负偏差: $\pm 10\%$
 The displacement curves
 are valid for air at 20℃
 Tolerance: $\pm 10\%$

link :


<https://agmacorp.com/product/%D9%BE%D9%85%D9%BE-%D9%88%D9%A9%DB%8C%D9%88%D9%85-%D8%B1%D9%88%D8%BA%D9%86%DB%8C-%D8%AC%D9%88%DB%8C%D8%B3%D8%A7%D9%86-joysun/>

AGMA


X-302 Single Stage Rotary Vane Vacuum Pump



Item	Unit	X-302
Rated Speed	m3/h	300
Utmost Pressure	mbar	0.1-0.5
Noice	dB (A)	75
Work temperature	°C	83
Oil consumption	L	8
Vapor permitted pressure	mbar	40
Suction rate of vapour	kg/h	5
Whorl of inlet	inch	Rp2"
Whorl of outlet	inch	Rp2"
Motor rated power	kW	7.5
Motor rated rotating speed	rpm	1440
Total weight	kg	211
Vacuum pump size	cm	101*56*44

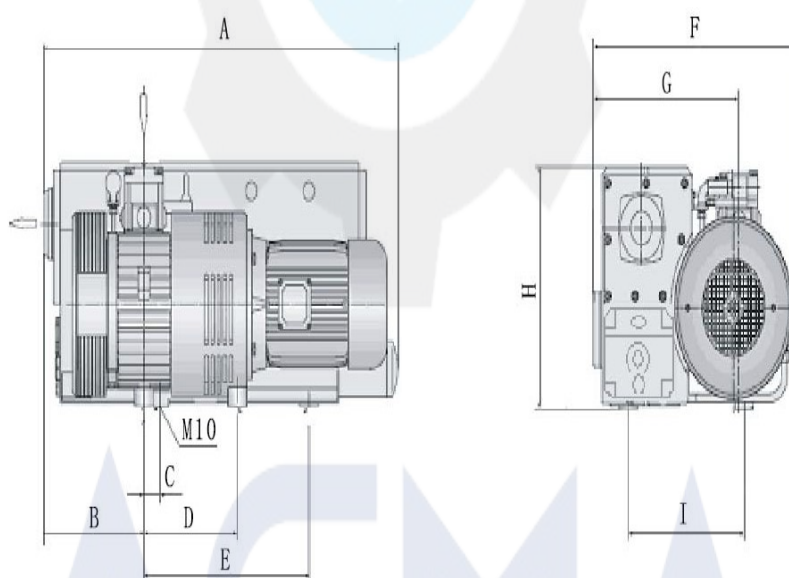


Dimension	A	B	C	D	E	F	G	H	I
X-302	1010	260	-	300	390	560	385	440	355

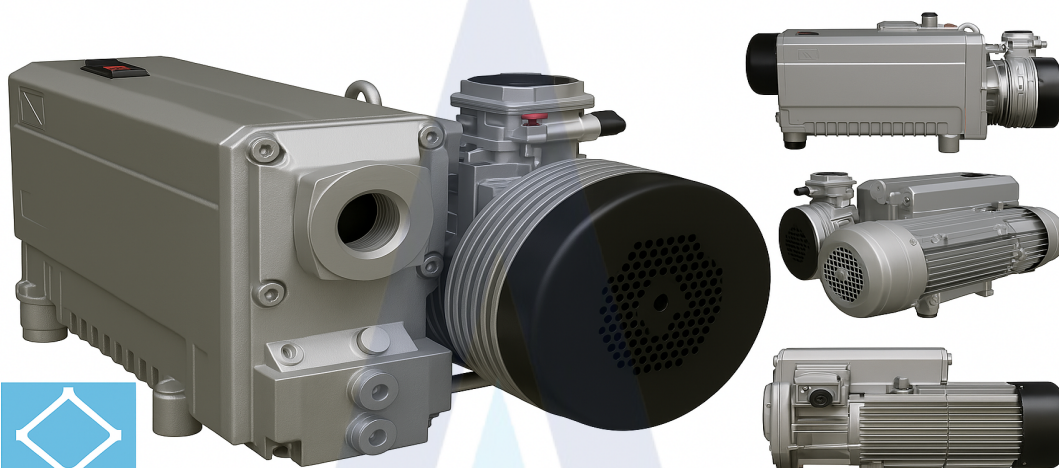

X-302

标准排量
Nominal
displacement

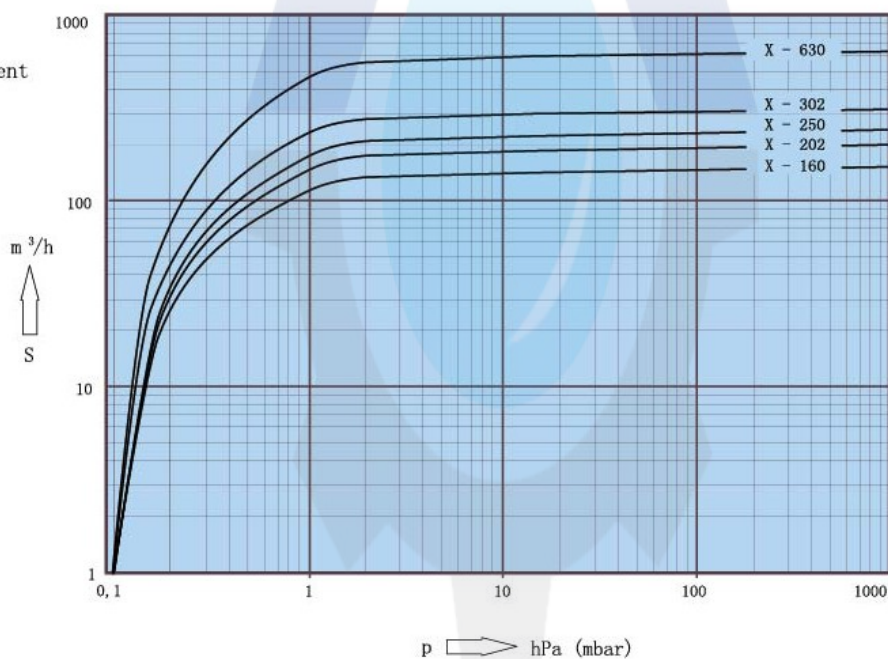

真空度曲线在气温
为20℃时有效。
正负偏差: ± 10%
The displacement curves
are valid for air at 20℃
Tolerance: ± 10%

link :


<https://agmacorp.com/product/%D9%BE%D9%85%D9%BE-%D9%88%DA%A9%DB%8C%D9%88%D9%85-%D8%B1%D9%88%D8%BA%D9%86%DB%8C-%D8%AC%D9%88%DB%8C%D8%B3%D8%A7%D9%86-joysun/>

AGMA

X-630 Single Stage Rotary Vane Vacuum Pump




Item	Unit	X-630
Rated Speed	m3/h	630
Utmost Pressure	mbar	0.1-0.5
Noice	dB (A)	80
Work temperature	°C	88
Oil consumption	L	25
Vapor permitted pressure	mbar	40
Suction rate of vapour	kg/h	7.5
Whorl of inlet	inch	Rp3"
Whorl of outlet	inch	Rp3"
Motor rated power	kW	18.5
Motor rated rotating speed	rpm	1000
Total weight	kg	550
Vacuum pump size	cm	178*88*73

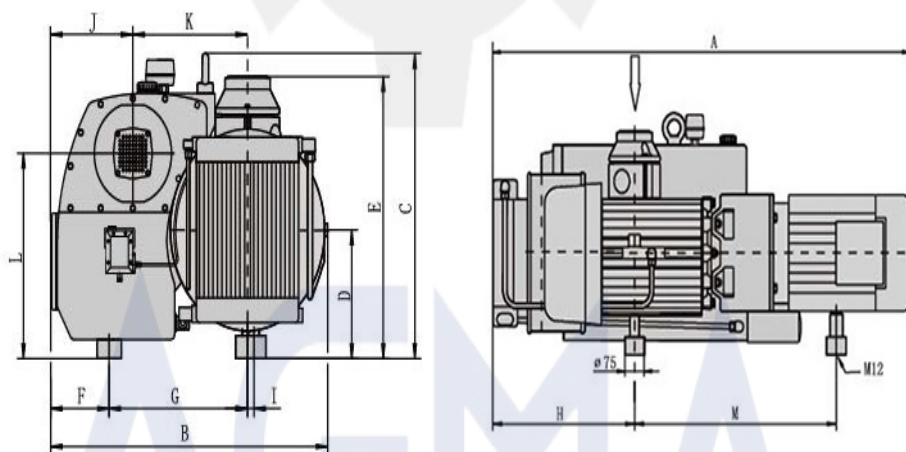

Dimension	A	B	C	D	E	F	G	H	I	J	K	L	M
X-630	1780	880	730	306	671	182	430	557	21	256	356	488	850

Vacuum Curve

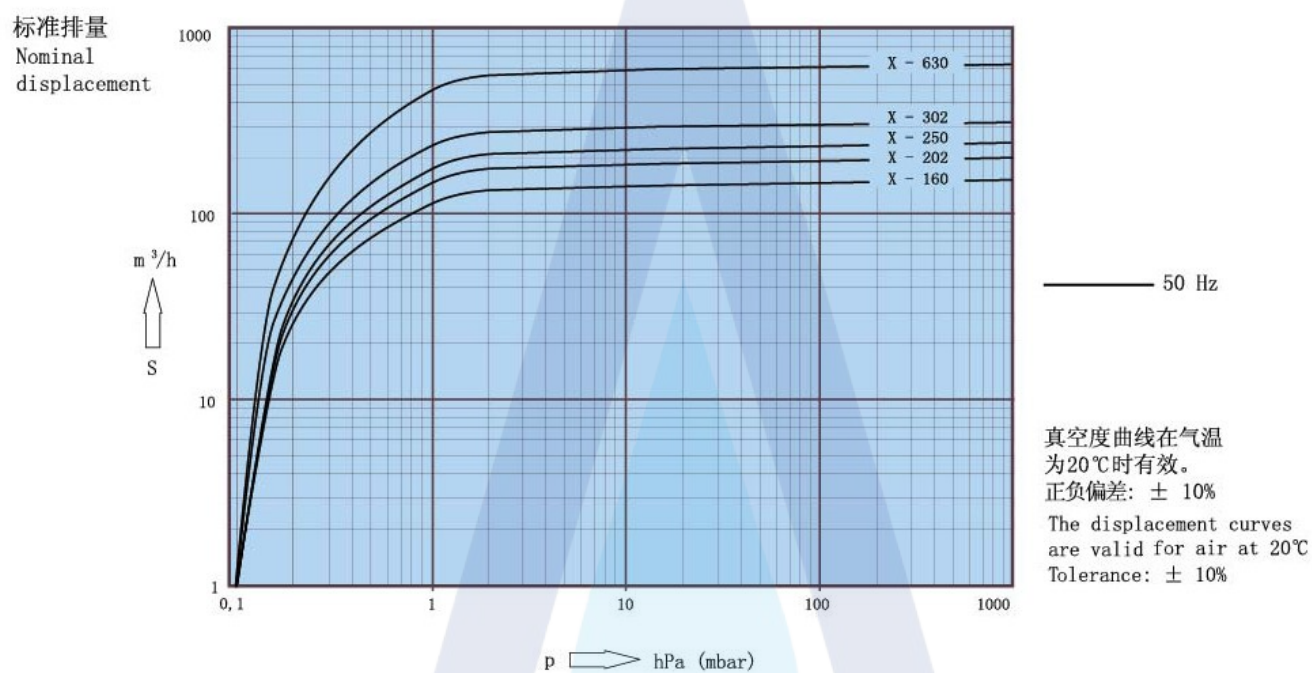

link :

<https://agmacorp.com/product/%D9%BE%D9%85%D9%BE-%D9%88%DA%A9%DB%8C%D9%88%D9%85-%D8%B1%D9%88%D8%BA%D9%86%DB%8C-%D8%AC%D9%88%DB%8C%D8%B3%D8%A7%D9%86-joysun/>

AGMA