
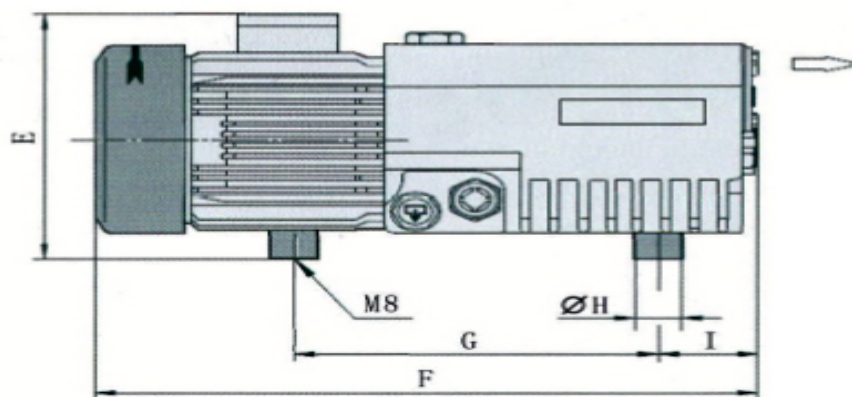


1

SVR

پمپ وکیوم روغنی بوش



WWW.AgmaCorp.IR

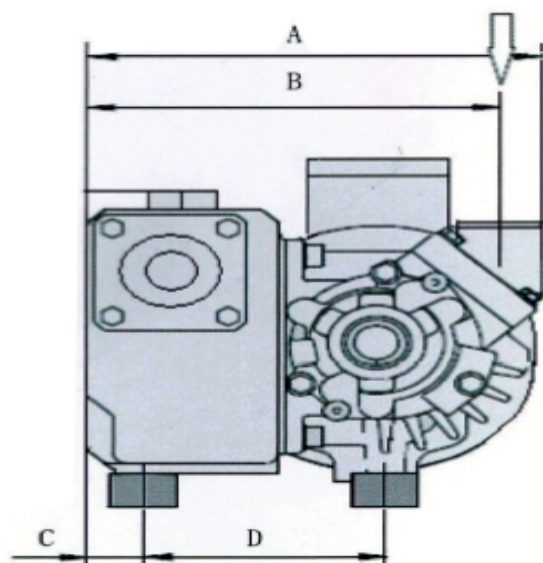

Mounting and overall dimensions

Dimensions	A	B	C	D	E	F	G	H	I
SVR-10 SVR-21	232	213	26	130	220	480	226	30	117
SVR-10 SVR-20	232	213	26	130	220	465	210	30	117
SVR-21	232	213	26	130	220	473	215	30	117
SVR-25	232	213	26	130	220	473	224	30	117
SVR-25	232	213	26	130	220	480	235	30	117

WWW.AgmaCorp.IR



SVR-10/20/21/25


SVR-10/20/21/25 Technical parameter for single-stage rotary vane vacuum pump

ITEMS \ MODEL	Units	SVR-10	SVR-20	SVR-21	SVR-25
Rated Speed	m ³ /h	10	20	21	25
Utmost Pressure	mbar	0.1-0.5	0.1-0.5	0.1-0.5	0.1-0.5
Noise	dB(A)	61	62	62	62
Work temperature	°C	81	82	82	82
Oil consumption	L	0.5	0.5	0.5	0.5
Vapor permitted pressure	mbar	40	40	40	40
Suction rate of vapour	kg/h	0.15	0.3	0.3	0.4
Whorl of inlet	inch	Rp ³ / ₄ "	Rp ³ / ₄ "	Rp ³ / ₄ "	Rp ³ / ₄ "
Motor rated power	kW	0.37	0.75	0.75	0.9
Motor rated rotating speed	rpm	1440	2880	2880	2880
Total weight	kg	17	17	18	19

We won't notice the changes of our technical specifications under normal circumstances.



SVR-10/20/21/25


SVR-10/20/21/25 Single-stage rotary vane vacuum pump

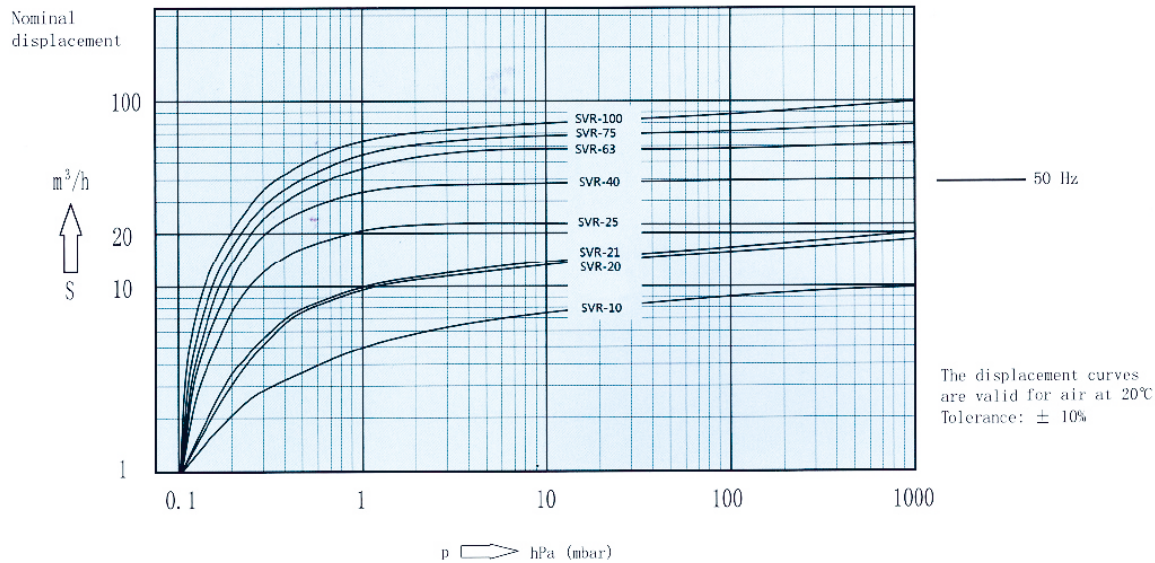

Mounting Dimensions

尺寸 Dimensions	A	B	C	D	E	F	G	H	I
SVR-40	650	150	290	195	270	185	300	280	55
SVR-63	650	150	265	295	285	278	430	295	—
SVR-75	670	160	280	295	285	278	430	295	—
SVR-100	720	180	295	295	285	278	430	295	—

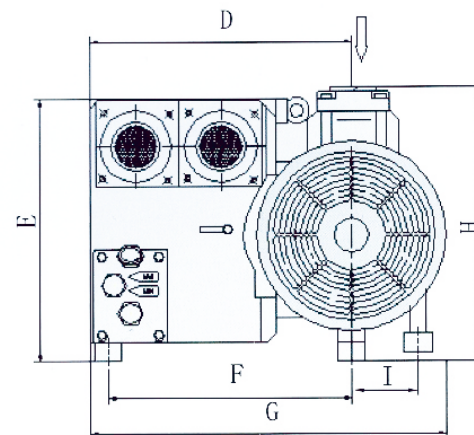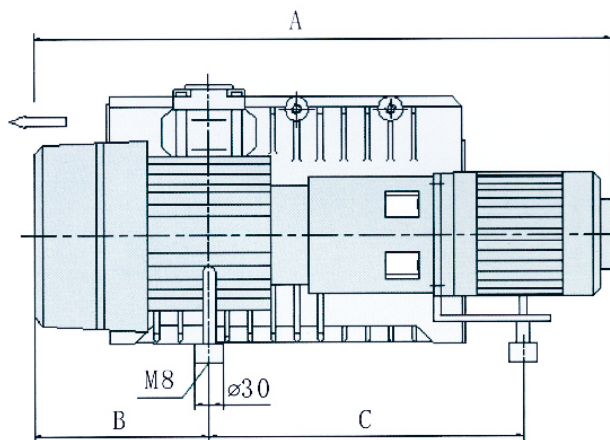




SVR-40/63/100

SVR-40/63/100 Technical parameter for single-stage rotary vacuum pump


ITEMS \ MODEL	Units	SVR-40	SVR-63	SVR-75	SVR-100
Rated Speed	m ³ /h	40	63	75	100
Utmost Pressure	mbar	0.1-0.5	0.1-0.5	0.1-0.5	0.1-0.5
Noise	dB(A)	64	65	65	66
Work temperature	°C	83	84	84	85
oil consumption	L	1.5	2	2	2
Vapor permitted pressure	mbar	40	40	40	40
Suction rate of vapour	kg/h	0.6	1	1.2	1.6
Whorl of inlet	inch	Rp1¼"	Rp1¼"	Rp1¼"	Rp1¼"
Whorl of outlet	inch	Rp1¼"	Rp1¼"	Rp1¼"	Rp1¼"
Motor rated power	kW	1.1	1.5	1.5	2.2
Motor rated rotating speed	rpm	1440	1440	1440	1440
Total weight	kg	48	58	60	72
Vacuum pump size	cm	65 × 30 × 28	65 × 43 × 29.5	67 × 43 × 29.5	72 × 43 × 29.5

We won't notice the changes of our technical specifications under normal circumstances.

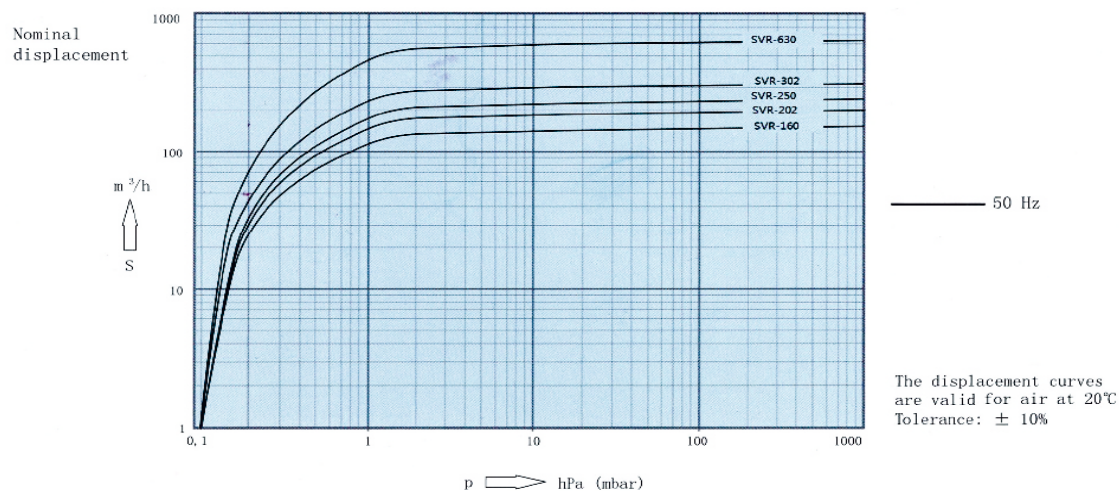

© Mounting Dimensions

Dimensions	A	B	C	D	E	F	G	H	I
SVR-160	855	225	40	240	430	495	345	435	310
SVR-202	855	225	40	240	430	495	345	435	310
SVR-250	980	260	—	300	390	560	385	440	355
SVR-302	1010	260	—	300	390	560	385	440	355

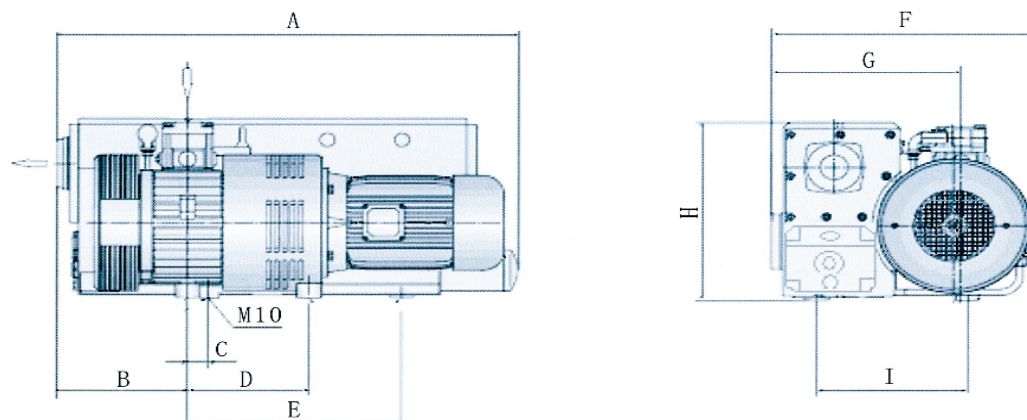



SVR-160/202/250/302

SVR-160/202/250/302 Technical parameter for single-stage rotary vane vacuum pump

ITEMS \ MODEL	Units	SVR-160	SVR-202	SVR-250	SVR-302
Rated Speed	m ³ /h	160	200	250	300
Utmost Pressure	mbar	0.1-0.5	0.1-0.5	0.1-0.5	0.1-0.5
Noise	dB(A)	71	73	73	75
Work temperature	°C	65	72	81	83
Oil consumption	L	5	5	8	8
Vapor permitted pressure	mbar	40	40	40	40
Suction rate of vapour	kg/h	2.5	4	4.5	5
Whorl of inlet	inch	Rp2"	Rp2"	Rp2"	Rp2"
Whorl of outlet	inch	Rp2"	Rp2"	Rp2"	Rp2"
Motor rated power	kW	4	4.8	5.5	7.5
Motor rated rotating speed	rpm	1440	1440	1440	1440
Total weight	kg	157	157	195	211
Vacuum pump size	cm	85.5×49.5×43.5	85.5×49.5×43.5	98×56×44	101×56×44

We won't notice the changes of our technical specifications under normal circumstances.